

**UTILITY
PATENT APPLICATION
TRANSMITTAL***(Only for new nonprovisional applications under
37 C.F.R. 1.53(b))*

Attorney Docket No.

CIS-1219

First Named Inventor or
Application Identifier

Robert L. Stewart

Express Mail Label No.

EL192647745US

PTO
09/31/96
JCS25 U.S. PTO

05/24/99

Title of
Invention

PRIORITIZING NETWORK MANAGEMENT TRAFFIC

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 18]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to microfiche Appendix
 - Background of the Invention
 - Summary of the Invention
 - Brief Description of the Drawings
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 7]
____ Formal ☒ Informal
4. ☐ Oath or Declaration/POA [Total Pages]
- a. ☐ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. 1.63(d))
(for continuation/divisional with Box 17 completed)
[NOTE Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4b, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS


8. ☐ Assignment Papers (cover sheet & documents)
9. ☐ 37 C.F.R. 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (2)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other:.....

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____ / _____
Prior application information: Examiner: _____ Group Art Unit: _____

18. CORRESPONDENCE ADDRESS

NAME	Leo R. Reynolds, Esq.				
	HAMILTON, BROOK, SMITH & REYNOLDS, P.C.				
ADDRESS	Two Militia Drive				
CITY	Lexington	STATE	MA	ZIP CODE	02421-4799
COUNTRY	USA	TELEPHONE	(781) 861-6240	FAX	(781) 861-9540

Signature		Date	5/24/99
Submitted by Typed or Printed Name	Leo R. Reynolds, Esq.	Reg. Number	20,884

-1-

Date: 5/24/99 Express Mail Label No. EL1926 47745 US

Inventors: Robert L. Stewart, Ramanathan R. Kavasseri, Sandra C. Durham
Attorney's Docket No.: CIS-1219

PRIORITIZING NETWORK MANAGEMENT TRAFFIC

BACKGROUND OF THE INVENTION

A computer network is a group of interconnected nodes communicating with one another. The interconnected nodes are devices such as, computers, routers, bridges
5 and switches. In a computer network in which all the nodes are local, for example, in the same building, a node can be managed by physically managing and controlling the node.

However, in computer networks in which there are non-local nodes, remote managing and controlling of nodes is necessary. To provide remote management and
10 control of nodes, a network manager is provided in one or more nodes in the computer network. The network manager includes one or more network management applications. The nodes managed and controlled by the network management applications are called managed elements.

A managed element includes managed objects. A managed object is any object
15 for which information is stored in the managed element. For example, the managed object may be text identifying the manufacturer of the managed element or a list of all nodes connected to the managed element. The managed element stores information for the managed object in a Managed Information Base ("MIB"), and makes it available to the network manager application.

20 The network management application may request information for a managed object stored in the managed element's MIB, using a network management protocol to communicate the request to the managed element. Standard network management

protocols, such as the Simple Network Management Protocol ("SNMP") described in the Internet Engineering Task Force ("IETF") Request For Comments (" RFC") standard Numbers 1901-1908 and 2271-2275, define a protocol for transferring information for managed objects between a network manager and a managed element.

5 Having retrieved the information for the managed object, the network management application may display the retrieved information on a monitor, record it for later analysis, or use it for automated management. The managed objects retrieved and displayed by a network management applications may include, for example, a list of all discovered devices in the computer network, the status of any discovered devices or
10 the number of data packets forwarded by the managed element.

 A request for retrieval of one a managed objects from a managed element is generated by the network management application in the management station. The request for retrieval of one or more managed objects requires a message to be sent from the management station to the managed element. Each time a selected managed object
15 is to be retrieved, a new message is required. Therefore, managing a managed object in the managed element may require continuously requesting information from the managed object. For example, to manage the performance of the computer network, the network management application may have to periodically request that the managed element return the value of a counter.

20 The number of requests for information from managed objects in the managed element directly affects the performance of the managed element. While the managed element is providing requested information from the managed object, data transfer through the managed element is reduced.

 Therefore, what is needed is a method for prioritizing requests from computer
25 network management applications.

SUMMARY OF THE INVENTION

 The present invention relates to prioritizing network management requests sent by a management station to a managed element. A priority value is assigned to the

network management request and the network management request is scheduled by the managed element dependent on the assigned priority value.

The priority value may be assigned to the network management request by the managed element. The managed element assigns the priority value by adding a priority value to an authentication group, including user identification values in an authentication table or by adding a priority value to a source identification in a source identification table. The network management request is scheduled by the managed element by extracting the user or source identification values from the network management request and using the extracted identification to index the corresponding table.

The priority value may be assigned by the management station. The management station assigns a priority value to each network management request before sending the network management request to the managed element. The priority value is extracted by the network management element and the managed element schedules the network management request dependent on the extracted priority value.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

FIG. 1 shows a management station and a managed element connected to a network, network management requests from network management applications in the management station, for a managed object in the managed element, are prioritized according to the principles of the present invention;

FIG. 2 shows a method for issuing a network management request from a network management application in the management station shown in FIG. 1 using the Simple Network Management Protocol;

FIG. 3 shows the format of a Simple Network Management Protocol message;

FIG. 4A shows the format of Local Control Data stored in the managed element shown in FIG. 1, for a managed element implementing Simple Network Management Protocol Version 3;

5 FIG. 4B shows the format of Local Control Data stored in the management element shown in FIG. 1, for a managed element implemented Simple Network Management Protocol Version 1 or Version 2;

FIG.5 is a flow diagram of a method implemented in the managed element shown in FIG. 1 for prioritizing network management requests from network
10 management applications;

FIG. 6 is a flow diagram of another method implemented in the managed element shown in FIG. 1 for prioritizing network management requests from network management applications.

FIG. 7 shows the format of a configuration file in the managed element for
15 prioritizing network management requests dependent on source address.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 shows a management station 102 and a managed element 104 connected to a network 100. The managed element 104 may be, for example, a router, a terminal server or a switch. The management station 102 may be a computer system. The
20 managed element 104 and management station 102 may be local or remote.

A network management protocol defines the protocol for communications between the management station 102 and the managed element 104 over the network 100. In the embodiment shown, the network management protocol used is the Simple Network Management Protocol ("SNMP") described in Internet Engineering Task Force
25 ("IETF") Request For Comments ("RFC") 1901-1908 and 2271-2275.

Network management information is stored in managed objects in the managed element's Managed Information Base ("MIB") 112. A managed object is information stored in a predefined format in the managed element. Managed objects may be requested by the management station. For example, the managed object may be text

identifying the managed element's physical network interface or text identifying the manufacturer of the managed element.

MIBs may be standard or private. In a standard MIB the definitions of the managed objects in the MIB have been approved by a standards organization, for
5 example, the managed objects defined for the Asynchronous Transfer Mode ("ATM") in IETF RFC Number 1695. A private MIB contains either non-standard definitions for managed objects in a management element or extensions to standard definitions of managed objects.

The management station 102 includes network management applications 106
10 and the management station's Management Information Base ("MIB") 108. The management applications 106 manage and control managed objects(not shown) stored in the managed element's MIB 112. The management station 102 observes or controls managed objects in the managed element 104 by sending a SNMP message 300 to read or write the information.

15 The managed element 104 includes the managed element's MIB 112 and an agent 110. The agent 110 is a processing entity to which a SNMP message 300 from the management station 102 is sent. The agent 110 interprets the contents of the SNMP message 300, performs the operation requested in the contents of the SNMP message 300 and returns a SNMP message 300 to the management station 102. The agent 110,
20 dependent on the contents of the SNMP message, either extracts the requested information from the managed object or modifies the managed object stored in the managed element's MIB 112. If the information is to be returned to the network management application 106, the agent 110 sends an SNMP message 300 containing the requested information over the network 100 to the management station 102.

25 The management station 102 and the managed element 104 include software instructions stored in bits in memory (not shown). The software instructions are grouped into software routines. The software routines perform operations in the management station 102 and the managed element 104.

As shown in FIG. 2, the management station 102 includes a number of network
30 management applications 106a-c. Any of the network management applications 106a-c

may request information from any managed object stored in the managed element's MIB 112(FIG. 1). The request for information from the managed object is sent to the SNMP interface 200.

The SNMP interface 200 creates an SNMP message 300 requesting information
5 from the managed object. The format of the SNMP message 300 is described in conjunction with FIG. 3. The SNMP message 300 includes a request for information from the managed object.

Having created the SNMP message 300 the SNMP interface 200 forwards the
SNMP message 300 to the network layers 204. As is well known in the art, before
10 sending the SNMP message 300 over the network the SNMP message 300 is forwarded to a transport layer, such as User Datagram Protocol ("UDP"). The transport layer processes the SNMP message 300 into UDP packets and forwards the packets to the network layer.

The network layer includes the IP protocol. The IP protocol adds an IP address
15 for the destination node to each packet. The size of the IP address added is dependent on the version of the IP protocol used. Version 4 of the IP protocol ("IPv4") adds a 32 bit IP address to each packet. Version 6 of the IP protocol ("IPv6"), adds a 128 bit IP address to each packet. The network layer forwards the packets including IP addresses to the Link layer. The Link layer sends the packets including the IP addresses, over the
20 physical medium through the management station's network physical interface 114.

FIG. 3 shows the format of the SNMP message 300 created in the SNMP layer
200(FIG. 2). The SNMP message 300 includes a Protocol Data Unit ("PDU") 304 and a message wrapper 302. The PDU 304 includes the request for information from the managed object in a predefined format. The format of the PDU 304 is defined by the
25 SNMP Structure of Management Information ("SMI"). The SMI also defines the language a MIB uses to describe managed objects. The format for the managed objects in the PDU 304 are constrained by the SMI. A standard MIB, such as the managed objects defined for the Asynchronous Transfer Mode ("ATM") in IETF RFC Number 1695 defines standard objects. A private MIB uses SMI to define proprietary managed

objects. The managed objects shared by the management station 102(FIG. 1) and the managed element 104(FIG. 1) may be standard or proprietary objects.

The format of the SNMP message wrapper 302 is dependent on the version of SNMP implemented in the management station 102 (FIG. 1) and the managed element 104(FIG.1). There are currently three versions of SNMP: they are Version 1 ("SNMPv1"), Version 2 ("SNMPv2c") and Version 3 ("SNMPv3").

The message wrapper for SNMPv3 includes a user identification. The user identification in the SNMP message wrapper 302 may be used for user authentication by the managed element 104(FIG. 1). The use of user identification for authentication in the message wrapper is described in IETF RFC Number 2274 published on the Internet in January 1998 and incorporated herein by reference. The user identification identifies the user of the network management application 106a-c (FIG. 2) in the management station 102 from which the SNMP message 300 is being sent. The user identification may be used in the managed element to identify the user and determine if the user has permission to access the information from the managed object that the user has requested.

SNMPv1 and SNMPv2c message wrappers 302 may include a community name. The use of a community name in the SNMP message wrapper 302 is described in the Internet Engineering Task Force ("IETF") Request For Comments ("RFC") 1902 published on the Internet in January 1996 and incorporated herein by reference. A community name may be assigned to each user or group of users of the management station and used for identification to determine if the user is allowed access to the information from a managed object stored in a managed element 104 (FIG. 2).

FIGs. 4A and 4B show a Local Configuration DataStore ("LCD") stored in the MIB 112(FIG. 1) in the managed element 104(FIG. 1). FIG. 4A shows an LCD for a managed element 104(FIG. 1) supporting SNMPv3. FIG. 4B shows an LCD for a managed element 104(FIG. 1) supporting SNMPv1 and SNMPv2c.

Referring to FIG. 4A, the LCD as shown includes three columns, a group identification column 404, a user identification column 406 and an assigned priority column 408. The group identification column 404 and the user identification column

406 provide support for authentication for SNMPv3 and are described in IETF RFC Number 2274. The assigned priority column 408 allows priority to be assigned to an SNMP message 300 dependent on the group number or user identification assigned to the SNMP message 300 by the management station 102 (FIG. 1). The user

5 identification column 406 identifies the user sending the SNMP message 300 from the management station 102. Each user identification is assigned to a group identification and each group is assigned a priority. For example, as shown in the first row 400 of the configuration file, user #1 and user #4 are assigned to group #1 and are assigned a priority level 3.

FIG. 4B shows an LCD for a managed element 104 supporting SNMPv2c or SNMPv1. The LCD as shown includes two columns, a community identification column 410, and an assigned priority column 412. The community identification is used to identify users sending SNMP messages 300 from the management station 102. A user is assigned to a community identification and each community identification is assigned a priority. For example, in the first row 418, community identification #1 is assigned to user #1 and user #4 and is assigned a priority of 3.

FIG. 5 shows the steps performed by the agent 110(FIG. 1) in the managed element 104 (FIG. 1) upon receiving an SNMP message 300 from the management station 102(FIG. 1).

20 In step 500 the agent 110 waits for an SNMP message 300 from the management station 102. After receiving an SNMP message 300, in step 502, the identification is extracted from the SNMP message wrapper 302(FIG. 3). The identification in the message wrapper 302 may be a community identification, or a user identification or group identification, dependent on the version of SNMP implemented in the
25 management station 102 (FIG.1) and the managed element 104 (FIG. 1).

In step 504, using the identification extracted from the SNMP message 300 the agent determines the priority of the SNMP message 300 from the LCD (FIGs. 4A -4B) stored in the MIB 112 (FIG. 1). For example, if a SNMPv3 message is sent from user #2, the user identification in the SNMP message wrapper 302 is set to the identification for user #2. The agent 110 (FIG. 1) uses the identification for user #2 to determine the

assigned priority, which is set to a priority value of '1' in column 408 (FIG. 4A) of the SNMPv3 LCD (FIG. 4A) stored in the MIB 112 (FIG. 1).

In step 506, the agent 110 (FIG. 1) determines the priority of the SNMP message 300 dependent on the identification extracted from the LCD. In step 601, if the priority of the network management request in the SNMP message 300 is lower than the network management requests included in the SNMP messages 300 currently being processed, the SNMP message 300 is added in order of priority to a pending SNMP message 300 queue (not shown), using any queuing algorithm known in the art.

In step 508, if the priority of the SNMP message 300 is higher than the priority of SNMP messages 300 on an active task queue (not shown) currently being processed by the agent 110 (FIG. 1), the agent 110 (FIG. 1) may determine that the SNMP message 300 is to be processed immediately. To immediately process the network management request included in the SNMP message 300, the SNMP message 300 is added to the front of the active task queue (not shown), using any queuing algorithm known in the art.

In an alternative embodiment, the priority of the SNMP message 300 may be added directly to the SNMP message 300 by the SNMP layer 200 (FIG. 1) in the management station 102 (FIG. 1). The priority of the SNMP message 300 may be added to the contents of the message wrapper 302 (FIG. 3) or the contents of the PDU 304 (FIG. 3). The priority added to the SNMP message wrapper 302 (FIG. 3) is dependent on the user identification from which the SNMP request message is being sent to the managed element 104 (FIG. 1). Adding priority to the SNMP message wrapper 302 (FIG. 3) or SNMP PDU 304 (FIG. 3) eliminates the need for priority columns 408, 412 in the LCD described in conjunction with FIGs. 4A and 4B.

Using this method a priority value is added to an SNMP message 300 in the SNMP layer 200 (FIG. 2) dependent on the user identification associated with user requesting information from a managed object stored in the managed element 104 (FIG. 1).

As shown in FIG. 6, in step 600 the agent 110 (FIG. 1) in the management station 104 receives an SNMP message 300. In step 602, the agent 110 (FIG. 1)

extracts the priority of the SNMP message 300 from the SNMP message wrapper 302 (FIG. 3) or the SNMP message PDU (FIG. 3). In step 604, dependent on the priority of the SNMP message 300, the agent 110 (FIG. 1) determines whether the SNMP message 300 should be processed immediately.

5 In step 608, the agent 110(FIG. 1) adds the SNMP message 300 to a pending task queue (not shown), to be processed whenever the managed element is not busy with tasks such as, data transfer or another SNMP message 300. The SNMP message 300 is added to the pending task queue (not shown) using any queuing algorithm known in the art.

10 In step 606, the agent 110 (FIG. 1) adds the SNMP message 300 to the active task queue (not shown), in order to process the SNMP message 300 immediately. The SNMP message 300 is added to the active task queue (not shown) using any queuing algorithm known in the art. If the priority of the SNMP message 300 is higher than other SNMP messages 300 or tasks on the active task queue, processing of the other
15 tasks may be suspended in order to process the higher priority SNMP message 300 using techniques well-known in the art.

Adding a priority field to the contents of the network management request is not limited to SNMP. A priority field may also be added to network management requests in other network management protocols, such as DECnet, the Common Management
20 Information Interface ("CMIP") and Common Object Request Broker Architecture/Internet Inter-Object Request Broker Protocol ("CORBA/IIOP").

FIG. 7 shows a portion of the contents of a configuration file for yet another embodiment for adding priority to network management requests from a management station 102 (FIG. 1) to a managed element 104 (FIG. 1). Using the configuration file,
25 network management requests are prioritized dependent on a network source address assigned to a network management request. The source address column 702 includes the network source addresses assigned to a network management request by the network layers 204 shown in FIG. 2. The source address assigned is dependent on the network protocol implemented in the network layers 204(FIG. 2). As discussed in conjunction

with FIG. 2 the source address may be an IP address if IP is implemented in the network layers 204 (FIG. 2).

The configuration file is stored in the managed element's MIB 112 (FIG. 1). The source identification column 702 provides a list of the source addresses from which the managed element accepts network management requests. A priority is assigned to each of the accepted source address in the priority column 704. Upon receiving a network management request from a network management application 106a-c (FIG. 2) in a management station 102 (FIG. 2), the agent 110 (FIG. 1) in the managed element 104 (FIG. 2) extracts the source address from the network management request. The agent 110 (FIG. 1) uses the source address to obtain the priority associated with the source address from the configuration file.

The network management request is either placed at the front of the queue of active tasks (not shown), or placed on a pending task queue (not shown) dependent on the priority of the network management request. Using this method urgent network management requests are processed before low priority network management requests and other tasks.

This embodiment of the invention is applicable to any network management protocol such as, DECnet, the Common Management Information Interface ("CMIP") and Common Object Request Broker Architecture/Internet Inter-Object Request Broker Protocol ("CORBA/IIOP").

It will be apparent to those of ordinary skill in the art that methods involved in the present invention may be embodied in a computer program product that includes a computer usable medium. For example, such a computer usable medium can consist of a read only memory device, such as a hard drive device or a computer diskette, having computer readable program code stored thereon.

While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. A method for prioritizing a network management request sent by a management station to a managed element, comprising the steps of:
 - 5 assigning a priority value to the network management request; and
 - scheduling the network management request, by the managed element dependent on the assigned priority value.
2. A method as claimed in Claim 1 wherein the step of assigning is performed by the managed element.
- 10 3. A method as claimed in Claim 2 wherein the step of assigning further comprises the step of:
 - adding a priority value to an authentication group comprising user identifications, in an authentication table.
4. A method as claimed in Claim 2 wherein the step of assigning further comprises the step of:
 - 15 adding a priority value to a source identification in a source identification table.
5. A method as claimed in Claim 3 wherein the step of scheduling further comprises the steps of:
 - 20 extracting a user identification from the network management request; and
 - determining the priority value by using the extracted user identification to index the authentication table.

6. A method as claimed in Claim 5 wherein the step of scheduling further comprises the step of:
- selecting the order of execution of the network management request dependent on the determined priority value.
- 5 7. A method as claimed in Claim 6 wherein the step of selecting further comprises the step of:
- preempting the currently executing task if the determined value for the management request is higher than the currently executing task.
- 10 8. A method as claimed in Claim 6 wherein the step of selecting further comprises the step of:
- adding the management request to the end of a request queue if the determined priority is lower than the priority of the tasks in the request queue.
- 15 9. A method as claimed in Claim 6 wherein the step of selecting further comprises the step of:
- adding the management request to the front of a request queue if the determined priority is higher than the priority of the tasks in the request queue.
- 20 10. A method as claimed in Claim 3 wherein the step of scheduling further comprises the step of:
- extracting the source identification from the network management request; and
- determining the priority value by using the extracted source identification to index the source identification table.
11. A method as claimed in Claim 10 wherein the step of scheduling further comprises the step of:

selecting the order of execution of the network management request dependent on the determined priority value.

12. A method as claimed in Claim 11 wherein the step of selecting further comprises the step of:
- 5 preempting a currently executing task if the determined value for the management request is higher than the currently executing task
13. A method as claimed in Claim 11 wherein the step of selecting further comprises the step of:
- 10 adding the management request to the bottom of a request queue if the determined priority is lower than the priority of the tasks in the request queue.
14. A method as claimed in Claim 11 wherein the step of selecting further comprises the step of:
- adding the management request to the top of a request queue if the determined priority is higher than the priority of the tasks in the request queue.
- 15 15. A method as claimed in Claim 1 wherein the step of assigning is performed by the management station.
16. A method as claimed in Claim 15 wherein the step of assigning further comprises the step of:
- 20 storing a priority value in the network management request before sending the network management request to the managed element.
17. A method as claimed in Claim 16 wherein the step of scheduling further comprises the step of:
- extracting the priority value from the network management request; and

scheduling the network management request dependent on the extracted priority value.

18. An apparatus for prioritizing a network management request sent by a management station to a managed element, comprising:
- 5 a priority assignment routine which assigns a priority value to the network management request; and
- a network management request routine which schedules the network management request in the managed element dependent on the assigned priority value.
- 10 19. An apparatus as claimed in Claim 18 wherein the assignment routine is located in the managed element.
20. An apparatus as claimed in Claim 19 wherein the priority assignment routine further comprises:
- 15 a priority value assignment routine which adds a priority value to an authentication group comprising user identifications, in an authentication table.
21. An apparatus as claimed in Claim 20 wherein the network management routine further comprises:
- a user identification extraction routine which extracts a user identification from the network management request; and
- 20 a priority value extraction routine which determines the priority value by using the extracted user identification to index the authentication table.
22. An apparatus as claimed in Claim 19 wherein the priority value assignment routine further comprises:
- a priority value assignment routine which adds a priority value to a
- 25 source identification in a source identification table.

23. An apparatus as claimed in Claim 22 wherein the network management routine further comprises:
- a source identification extraction routine which extracts the source identification from the network management request; and
 - 5 a priority value determination routine which determines the priority value using the extracted source identification to index the source identification table.
24. An apparatus as claimed in Claim 18 wherein the assignment routine is located in management station.
- 10 25. An apparatus as claimed in Claim 22 wherein the assignment routine further comprises:
- a priority value assignment routine which stores a priority value in the network management request before sending the network management request to the managed element.
- 15 26. An apparatus as claimed in Claim 25 wherein network management routine further comprises:
- a priority extraction routine which extracts the priority value from the network management request; and
 - a request scheduling routine which schedules the network management
 - 20 request dependent on the extracted priority value.
27. An apparatus for prioritizing a network management request sent by a management station to a managed element, comprising:
- a priority assignment routine;
 - a network management request scheduler;
 - 25 means, within the priority assignment routine, for assigning a priority value to the network management request; and

means, within the network management request scheduler, for scheduling the network management request in the managed element dependent on the assigned priority value.

- 5 28. A computer program product for prioritizing a network management request sent by a management station to a managed element, the computer program product comprising a computer usable medium having computer readable code thereon, including program code which:

 assigns a priority value to the network management request; and

- 10 schedules the network management request in the managed element dependent on the assigned priority value.

PRIORITIZING NETWORK MANAGEMENT TRAFFIC

ABSTRACT OF THE DISCLOSURE

In a computer network, network management applications in a network management station manage and control managed elements connected to the network through the use of network management requests. The network management requests are prioritized by the management station or the managed element. The managed element prioritizes received requests by pre-assigning priority values corresponding to user identification values included in the request or by pre-assigning priority values corresponding to source identification values included in the request. The management station prioritizes the network management requests by adding a priority value to each network management requests before sending the request to the managed element. The managed element extracts the priority value directly from the request or dependent on the user identification or source identification included in the request.

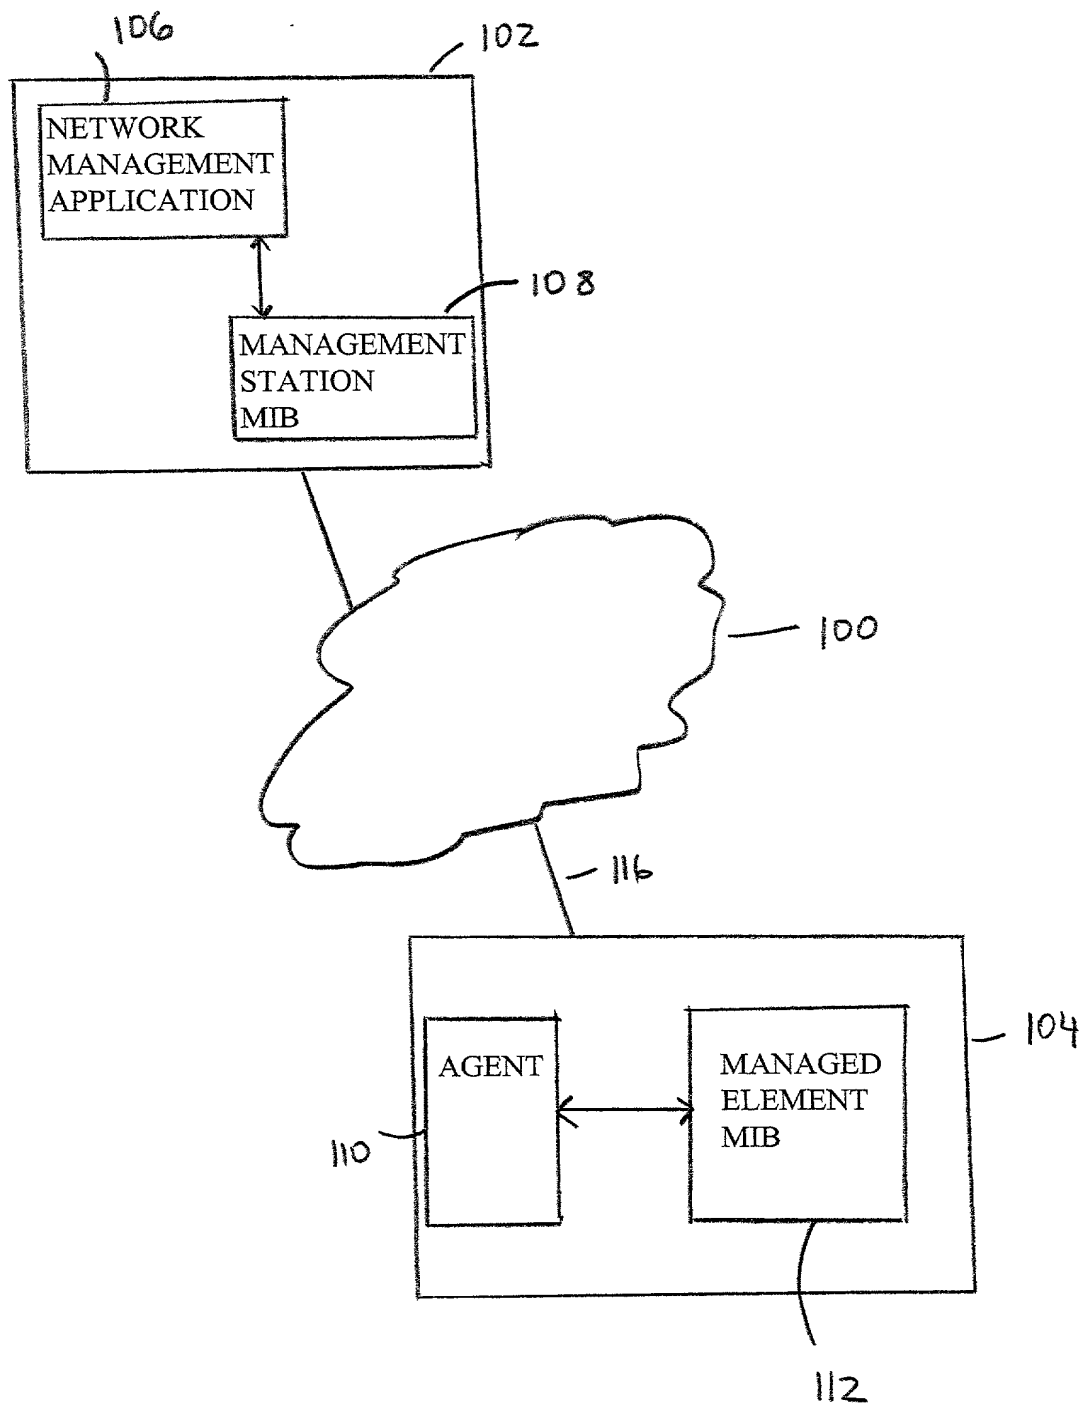


FIG. 1

102

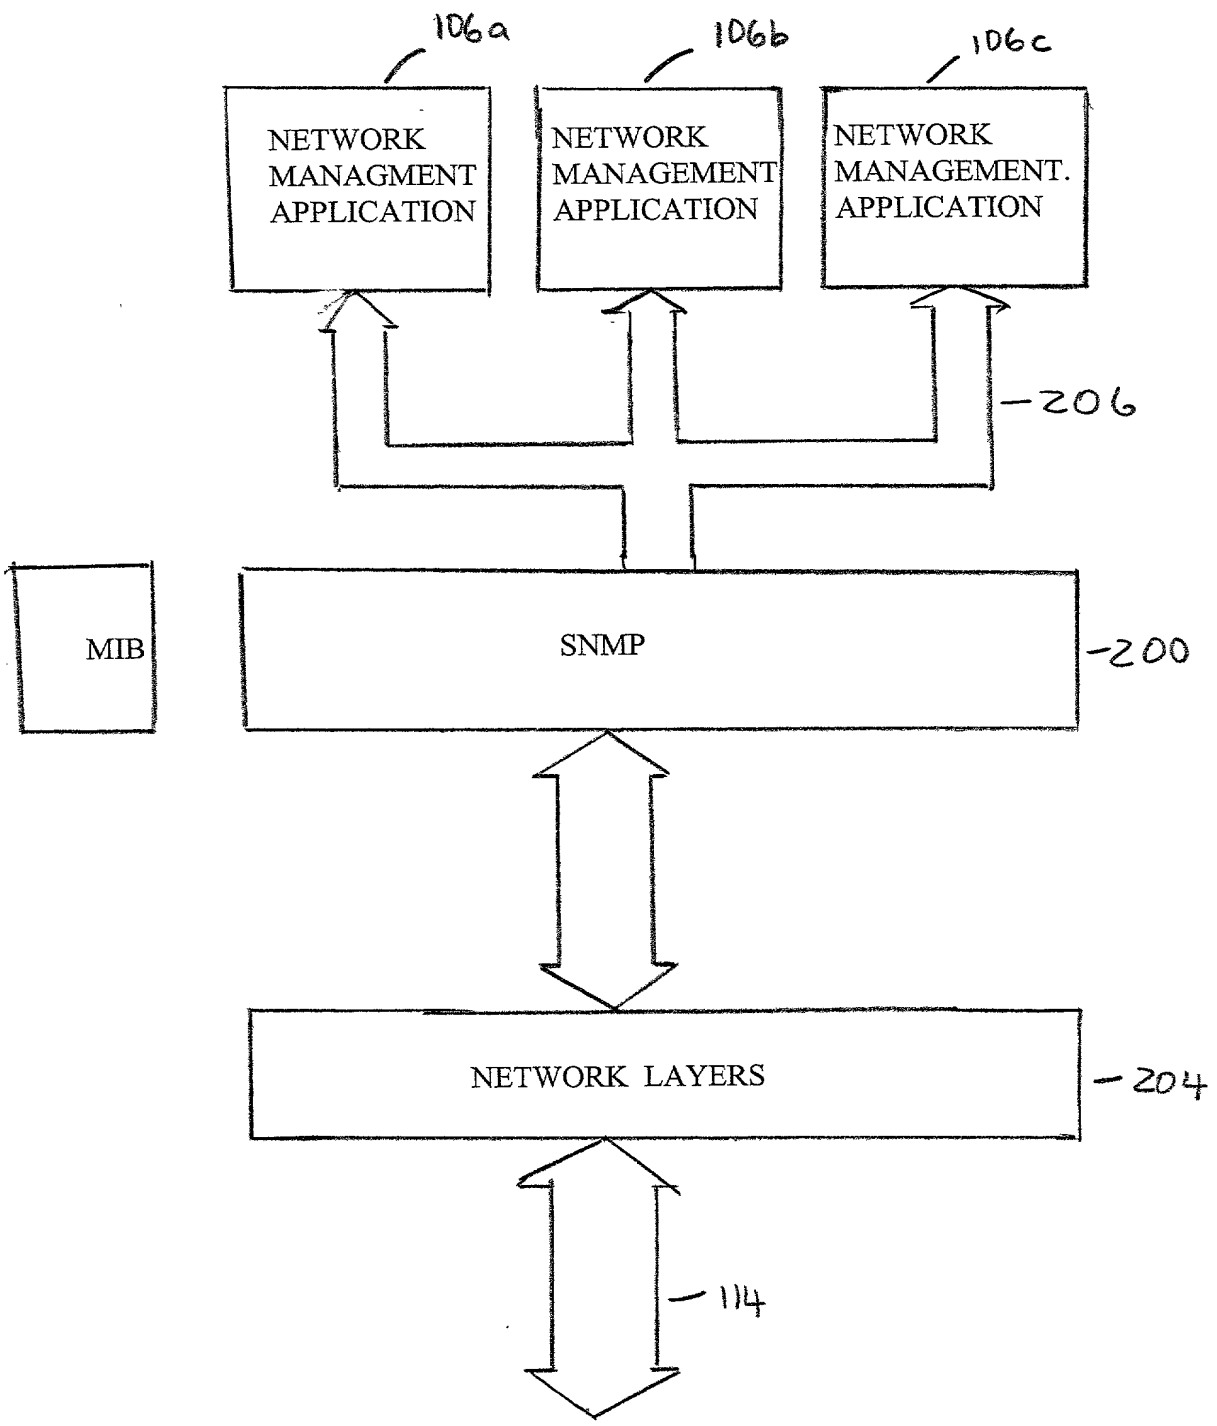


FIG. 2

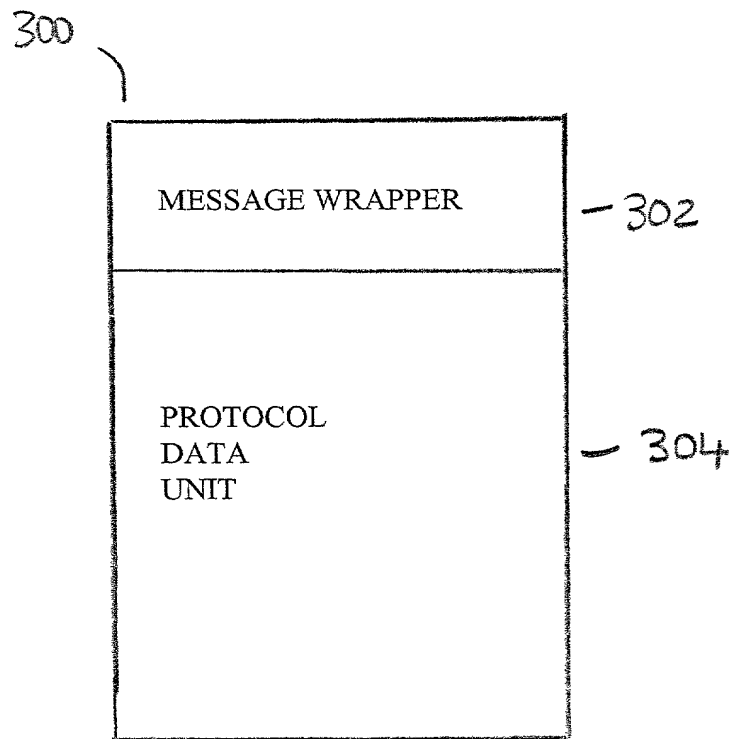


FIG. 3

400	404		406		408	
	GROUP # 1	USER # 1 USER # 4	PRIORITY LEVEL 3			
	GROUP # 2	USER #2 USER #5	PRIORITY LEVEL 1			
402	GROUP #3	USER #2	PRIORITY LEVEL 2			

FIG. 4A

418	COMMUNITY #1 (USER #1; USER #4)	PRIORITY LEVEL 3
420	COMMUNITY #2 (USER #2; USER #5)	PRIORITY LEVEL 1
422	COMMUNITY #3 (USER #3)	PRIORITY LEVEL 2

FIG. 4B

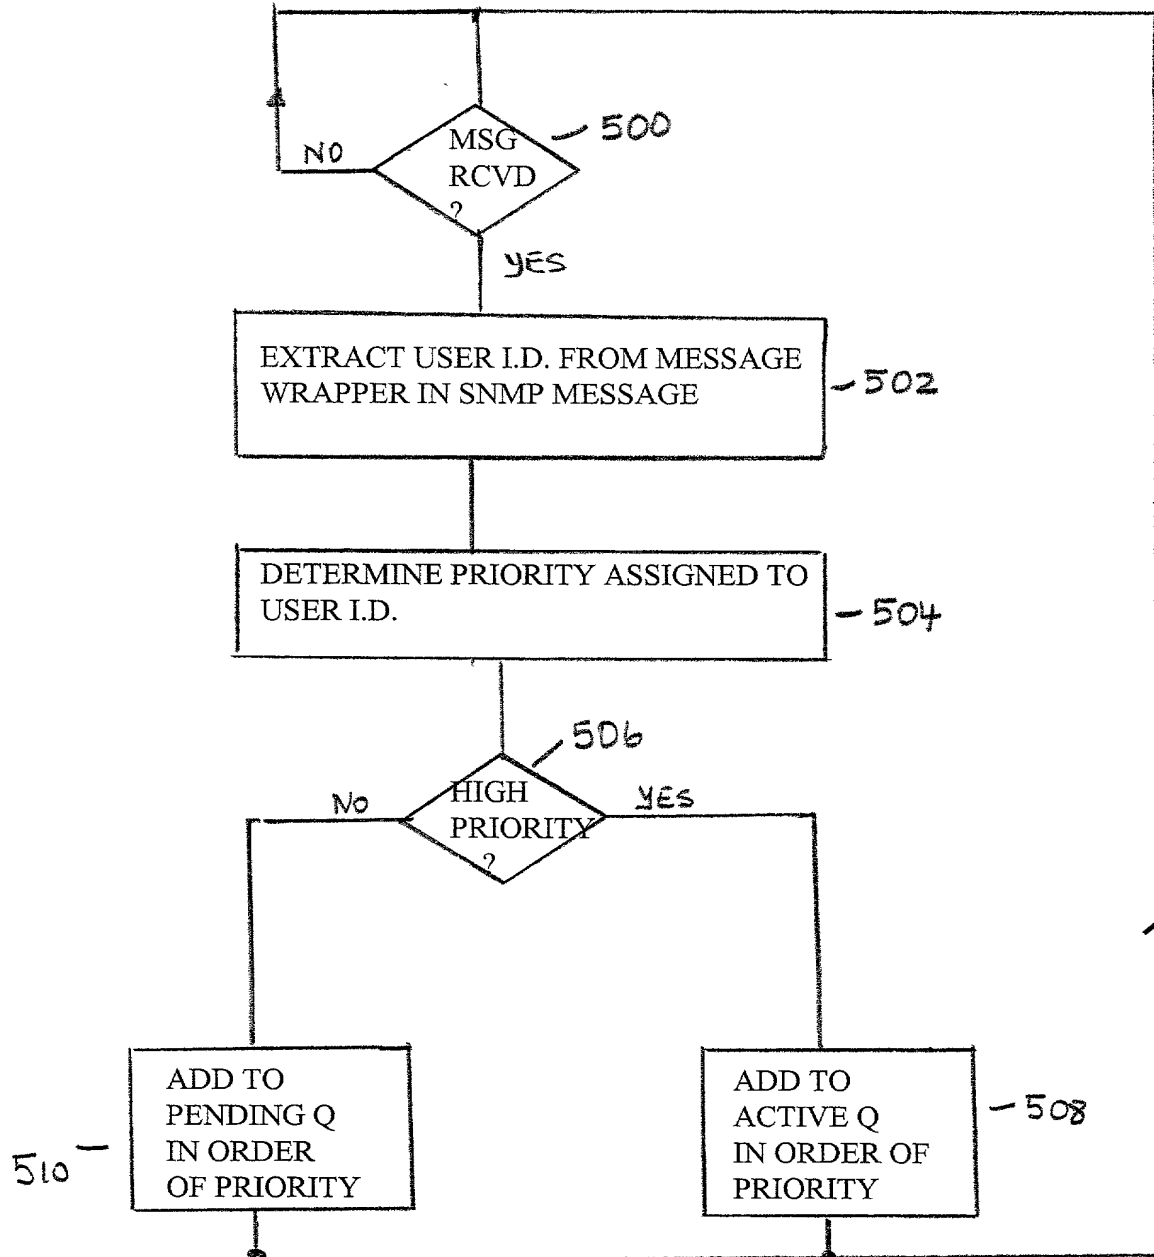


FIG. 5

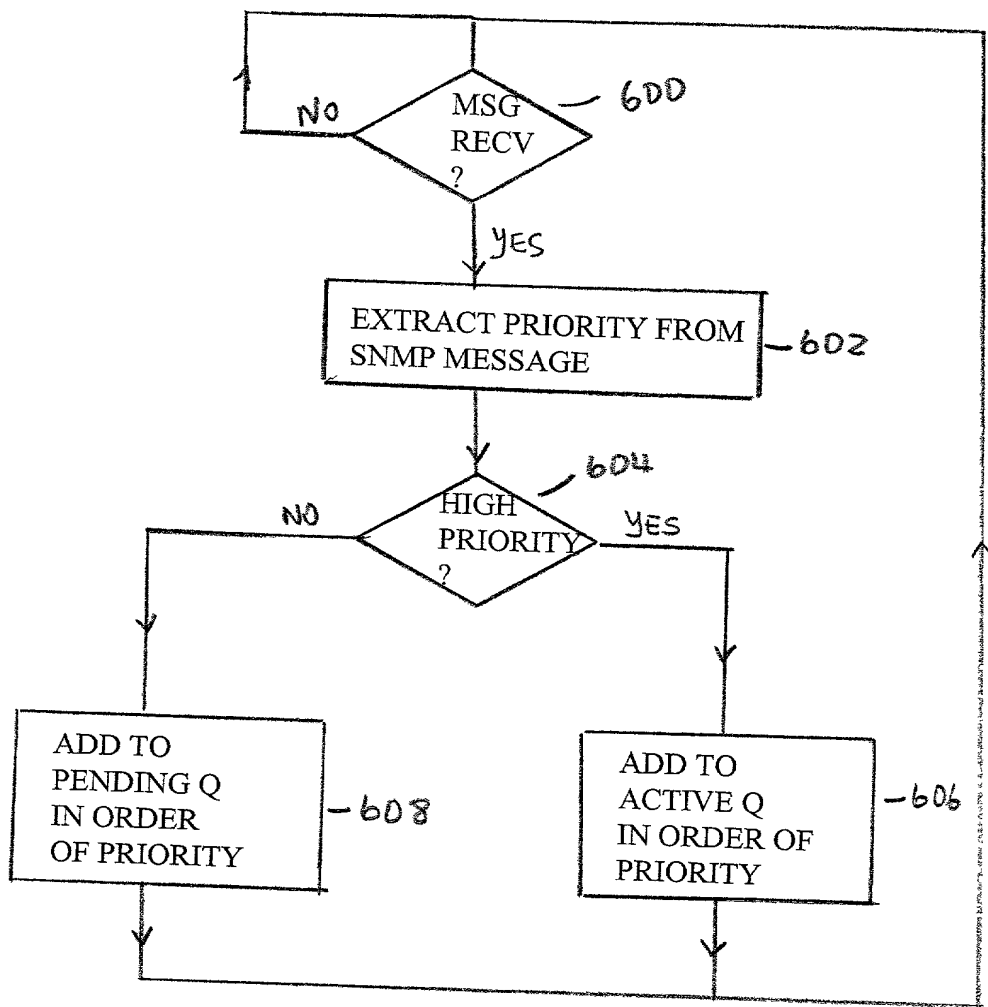


FIG. 6

664250 " 94/27650

SOURCE IDENTIFICATION #1	PRIORITY LEVEL 2
SOURCE IDENTIFICATION #2	PRIORITY LEVEL 1

FIG. 7